



Izolovana okasta papučica DIN 46237 A  
Materijal: Bakar  
Zaštita: Kalajisanje  
Izolacija: PA


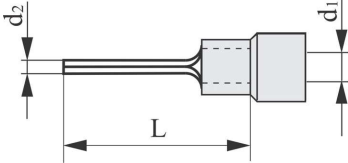




Kod	Presek provodnika mm <sup>2</sup>	Nazivna mera mm-mm <sup>2</sup>	d <sub>1</sub> mm	d <sub>2</sub> mm	L mm	BOJA izolacije	Pakovanje kom.
2050	0.5 - 1	2.5 - 1	1.6	2.7	11	crvena	500
2051		3 - 1	1.6	3.2	11		
2052		4 - 1	1.6	4.3	12		
2053		5-1	1.6	5.3	12		
2055	1.5 - 2.5	3 - 2.5	2.3	3.2	11	plava	500
2056		4 - 2.5	2.3	4.3	12		
2057		5 - 2.5	2.3	5.3	14		
2058		6 - 2.5	2.3	6.5	16		
2059		8 - 2.5	2.3	8.4	17		
2060	4 - 6	4 - 6	3.6	4.3	14	žuta	500
2061		5 - 6	3.6	5.3	14		
2062		6 - 6	3.6	6.5	16		
2063		8 - 6	3.6	8.4	19		
2064		10 - 6	3.6	10.5	21		



Izolovana viljuškasta papučica DIN 46237 B  
Materijal: Bakar  
Zaštita: Kalajisanje  
Izolacija: PA





Kod	Presek provodnika mm <sup>2</sup>	Nazivna mera mm-mm <sup>2</sup>	d <sub>1</sub> mm	d <sub>2</sub> mm	L mm	BOJA izolacije	Pakovanje kom.
2071	0.5 - 1	3 - 1	1.6	3.2	10.5	crvena	500
2072		4 - 1	1.6	4.3	12.0		
2073		5 - 1	1.6	5.3	13.5		
2074		6-1	1.6	6.5	15.5		
2075	1.5 - 2.5	3 - 2.5	2.3	3.2	10.5	plava	500
2076		4 - 2.5	2.3	4.3	11.5		
2077		5 - 2.5	2.3	5.3	14.5		
2078		6 - 2.5	2.3	6.5	16.0		
2079	4 - 6	4 - 6	3.6	4.3	14.0	žuta	500
2080		5 - 6	3.6	5.3	15.0		
2081		6 - 6	3.6	6.5	16.5		
2082		8 - 6	3.6	8.4	19.5		
2083		10 - 6	3.6	10.5	21.0		



Izolovani igličasti kontakt DIN 46231 Materijal: Bakar Zaštita: Kalajisanje Zaštita: PA						
						
Kod	Presek provodnika mm <sup>2</sup>	d <sub>1</sub> mm	d <sub>2</sub> mm	L mm	BOJA izolacije	Pakovanje kom.
2301	0.5-1	1.8	1.9	18	crvena	500
2302	1.5-2.5	2.3	1.9	18	plava	
2303	4-6	3.6	2.7	20	žuta	

Natični kontakt sa izolacijom DIN 46245 Materijal: CuZn Zaštita: Kalajisanje Zaštita: PA						
						
Kod	Presek provodnika mm <sup>2</sup>	d <sub>1</sub> mm	d <sub>2</sub> mm	L mm	BOJA izolacije	Pakovanje kom.
7001	0.5-1	6.3	2.0	22	crvena	100
7002	1.5-2.5	6.3	2.8	22	plava	500
7003	4-6	6.3	3.5	23	žuta	

Utični kontakt sa izolacijom Materijal: CuZn Zaštita: Kalajisanje Zaštita: PA						
						
Kod	Presek provodnika mm <sup>2</sup>	d <sub>1</sub> mm	d <sub>2</sub> mm	L mm	BOJA izolacije	Pakovanje kom.
7011	0.5-1	6.3	2.0	22	crvena	100
7012	1.5-2.5	6.3	2.8	22	plava	500
7013	4-6	6.3	3.5	23	žuta	

Izolovane čaure za nastavljjanje provodnika Materijal: Cu Zaštita: Kalajisanje Zaštita: Poliamid 6.6					
					
Kod	Presek provodnika mm <sup>2</sup>	d <sub>1</sub> mm	L mm	BOJA izolacije	Pakovanje kom.
7021	0.5-1	1.8	22	crvena	100
7022	1.5-2.5	2.5	22	plava	500
7023	4-6	3.8	23	žuta	

Izolovane hilzne za kraj provodnika DIN 46228 E  
Materijal: Bakar  
Zaštita: Kalajisanje  
Izolacija: Poliamid 6.6

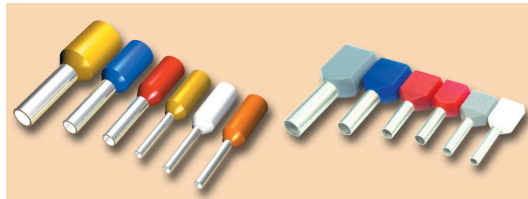

Kod	Presek provodnika mm <sup>2</sup>	d <sub>1</sub> mm	L <sub>1</sub> mm	L <sub>2</sub> mm	Pakovanje kom.
2501	0.25	0.8	10	6	500
2502	0.5	1.0	14	8	
2503	0.75	1.2	14	8	
2504	1.0	1.4	14	8	
2505	1.5	1.7	16	8	
2506	2.5	2.2	18	10	
25061	4	2.8	18	10	
2507	6	3.6	20	12	
2510	10	4.5	28	18	
2508	16	5.8	28	18	
2562	2x0.5				1000
2563	2x0.75				
2564	2x1.0				
2565	2x1.5				
2566	2x2.5				
2567	2x4.0				
	2x6.0				
	2x10				
	2x16				
2511	25	7.3	30	18	
2512	35	8.3	30	18	
2513	50	10.3	40	25	