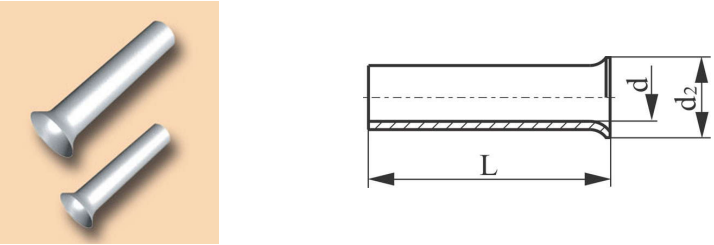

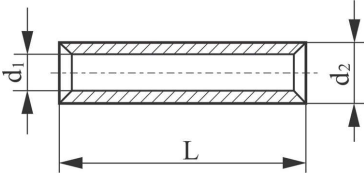




<p>Hilzne za kraj provodnika DIN 46228/1 Materijal: Bakar Zaštita: Kalajisanje</p>					
					
Kod	Presek provodnika mm <sup>2</sup>	d <sub>1</sub> mm	d <sub>2</sub> mm	L mm	Pakovanje kom.
2521	0.25	0.75	1.7	7	500
2522	0.5	1.0	2.1	8	
2523	0.75	1.2	2.3	8	
2524	1	1.4	2.5	10	
2525	1.5	1.7	2.8	10	
2526	2.5	2.2	3.4	10	
2528	4	2.8	4.0	12	1000
2532	6	3.5	4.7	12	
2529	6	3.5	4.7	15	
2535	6	3.5	4.7	20	
2534	10	4.5	5.8	15	
2536	10	4.5	5.8	20	
2530	16	5.8	7.5	20	
2531	35	8.3	11	32	

Čaure za nastavljjanje provodnika Materijal: Bakar Zaštita: Kalajisanje					
					
Kod	Presek provodnika mm <sup>2</sup>	d <sub>1</sub> mm	d <sub>2</sub> mm	L mm	Pakovanje kom.
7031	0.5-1	2.4	3.4	15	100  500
70312	0.5-1	2	3	25	
7032-2	1.5-2.5	3	4	6	
7032-3	1.5-2.5	3	4	7	
7032	1.5-2.5	3	4	12	
7034	1.5-2.5	3	4	21	
7033	2.5-6	4	5	15	
7035	2.5-6	4	5	21	
70330	2.5-6	4.4	6	30	

Igličasti kontakt DIN 46230 Materijal: Bakar Zaštita: Kalajisanje					
					
Kod	Presek provodnika mm <sup>2</sup>	d <sub>1</sub> mm	d <sub>2</sub> mm	L mm	Pakovanje kom.
2311	0.5-1	1.8	1.9	18	100 1000
2312	1.5-2.5	2.3	1.9	18	
23122	1.5-2.5 Č-Ni	2.3	1.9	18	
2313	2.5-6	3.6	2.7	20	